

277

MADE IN USA.

2-way sound systems

100% Factory Quality Control


100% Factory Speaker Construction

100% Factory Tested

5 year Warranty

Manufactured with Pride in the United States

The 277 loudspeaker yields 70 degrees horizontal coverage at 50 degrees vertical

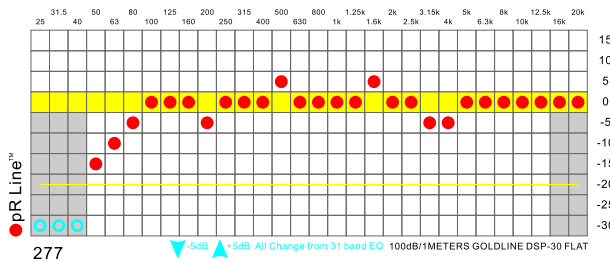

SPECIFICATIONS:

System Type:
2-way, Full range, bass ported

Drivers:
LF (1 x Csp 15LV2i)
HF (1 x Csp H452)

Frequency Range:
55 Hz - 20 kHz (-10 dB)
80 Hz - 20 kHz (+/-3 dB)

High Frequency Driver
Protection:
SP DDPJ

Power Capacity:
400 W Continuous
1600 W Peak

Input Connection:
2 x 1/4" phone jacks in parallel

Recommended Power
Amplifier:
P.PA Series

Enclosure Hardware:
3/4" MDF wood, UPWEJ black
polyurea finish

Sensitivity (1w/1m):
99 dB

Grille:
18 gauge perforated steel,
additional powder coated

Maximum Output:
131 dB

Dimensions (H x W x D):
25" x 17.25" x 16.625"
635 mm x 438 mm x 422 mm

Nominal Impedance:
8 Ohms

Weight:
56 lbs (25 kg)

Nominal Dispersion:
70° x 50°

Shipping weight:
63 lbs (28 kg)

Crossover:
T5r277

APPLICATIONS:

Sound Reinforcement
Clubs, Karaoke Clubs, Health Clubs
Offices, Classrooms, Meeting Rooms
A/V Systems
Houses of Worship
Sport Facilities
Distributed Systems

FEATURES:

Lv2 Technology, Flying version
High power handling - 400 watts(average) and 1600
watts(peak) power capacity
70° x 50° horn designed for even coverage and smooth
response on and off axis
1" Titanium HF Driver
SP DDPJ Distortion Dynamic Protection
The advanced network topology crossover design shapes the
frequency response to deliver coherent summation in the
crossover region
3/4" MDF wood, UPWEJ (Ultrachrome Protecting wood
enclosures) black polyurea finish
18 gauge perforated steel, additional powder coated

Csp Professional
5157 Cliffwood Dr., Montclair, CA 91763 USA
info@cspopro.com
All information is Copyright © 2005 Csp

www.cspopro.com

277

Csp