


288

MADE IN USA.

2-way sound systems

- 100% Factory Quality Control
- 100% Factory Speaker Construction
- 100% Factory Tested
- 5 year Warranty
- Manufactured with Pride in the United States

288 is composed of 8" units. Ultra heavy low frequency, bright mid to high frequency with high sensitivity and large output. It is a fusion of high-end acoustics and professional output power. 2-way sound systems, special Flying Version.

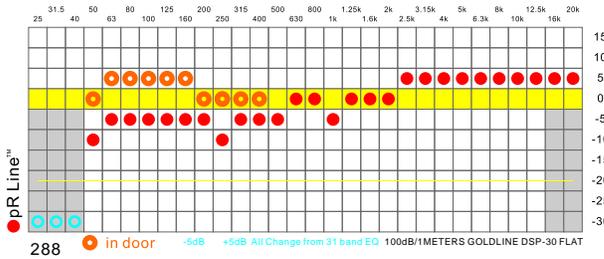

288



SPECIFICATIONS:

System Type: 2-way, Full range, bass ported	Drivers: LF (1 x Csp 8LV2x) HF (1 x Csp H452)
Frequency Range: 50 Hz - 20 kHz (-10 dB) 65 Hz - 20 kHz (+/-3 dB)	Input Connection: One two-terminal barrier strip input connectors
Power Capacity: 225 W Continuous 900 W Peak	Enclosure Hardware: 3/4" MDF wood, UPWEJ black polyurea finish
Recommended Power Amplifier: P.PA Series	Grille: 18 gauge perforated steel, additional powder coated
Sensitivity (1w/1m): 97 dB	Dimensions (H x W x D): 10.875" x 16" x 10.875" 276 mm x 406 mm x 276 mm
Maximum Output: 126.5 dB	Weight: 28.5 lbs (12.7 kg)
Nominal Impedance: 8 Ohms	Shipping weight: 60.5 lbs (27 kg)/2Pcs
Nominal Dispersion: 90° x 90°	
Crossover: T5r288	

APPLICATIONS:

- Clubs, Karaoke Clubs, Health Clubs
- Offices, Classrooms, Meeting Rooms
- A/V Systems
- Houses of Worship
- Sport Facilities
- Distributed Systems

FEATURES:

- Lv2 Technology, Flying version
- High power handling - 225 watts(average) and 900 watts(peak) power capacity
- 90° x 90° horn designed for even coverage and smooth response on and off axis
- 1" Titanium HF Driver
- The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region
- 3/4" MDF wood, UPWEJ (Ultrachrome Protecting wood enclosures) black polyurea finish
- 18 gauge perforated steel, additional powder coated

Csp Professional
5157 Cliffwood Dr., Montclair, CA 91763 USA
info@cspopro.com
All information is Copyright © 2005 Csp

www.cspopro.com