

FS15

Csp

FS15

MADE IN USA.

2-way sound systems


If you have a chance to hear the sound of RS series, you will be shocked to hear the fine and smooth rendition of the product!

There are four different FS products. They are FS8, FS12, FS15 and FS25, which have full audio frequency.

Each of this series is of refined design. From the 8" frequency-halving design to the twin 15" ultra bass design, the accuracy of treble and dynamics of bass are among the top in the industry.

The special design of the speaker box helps maximally improve the product's range of application. The suspension device makes the installation more flexible and versatile.

The special UPWE processing of its housing helps extending the range of application of the product series outdoor. Thus, it is a true all-weather product.

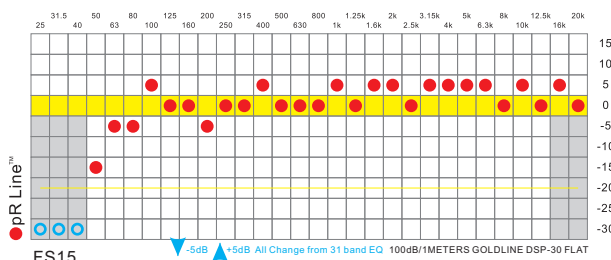

SPECIFICATIONS:

System Type:
2-way, Full range, bass ported

Drivers:
LF (1 x Csp 15LV2i)
HF (1 x PZT)

Frequency Range:
45 Hz - 20 kHz (-10 dB)
60 Hz - 20 kHz (+/-3 dB)

High Frequency Driver
Protection:
None

Power Capacity:
300 W Continuous
1200 W Peak

Input Connection:
2 x 1/4" phone jacks in parallel

Recommended Power
Amplifier:
PaulAudio 202

Enclosure Hardware:
3/4" MDF wood, UPWE™ black
polyurea finish

Sensitivity (1w/1m):
98 dB

Grille:
18 gauge perforated steel,
additional powder coated

Maximum Output:
128.8 dB

Dimensions (H x W x D):
24.875" x 17.125" x 14.125"
632 mm x 435 mm x 358 mm


Nominal Impedance:
8 Ohms

Weight:
48 lbs (21.3 kg)

Nominal Dispersion:
45° x 90°

Shipping weight:
51.5 lbs (23 kg)

Crossover:
T5rfs15

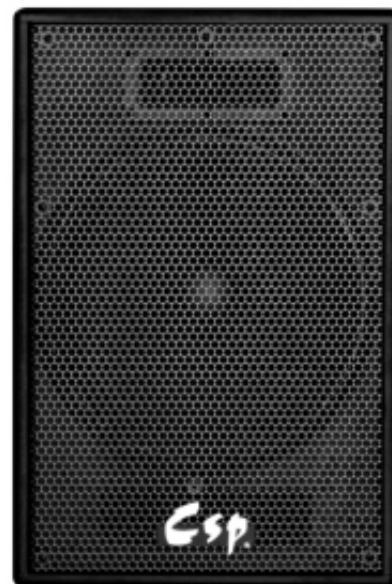

APPLICATIONS:

Sound Reinforcement
Clubs, Karaoke Clubs, Health Clubs
Offices, Classrooms, Meeting Rooms
A/V Systems
Houses of Worship
Sport Facilities
Distributed Systems

FEATURES:

Lv2 Technology, Flying version
High power handling - 300 watts(average) and 1200 watts(peak) power capacity
90° x 90° horn designed for even coverage and smooth response on and off axis
1" PZT HF Driver
SP DDP™ Distortion Dynamic Protection
The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region
3/4" MDF wood, UPWE™ (Ultrachrome Protecting wood enclosures) black polyurea finish
18 gauge perforated steel, additional powder coated

Csp Professional
5157 Cliffwood Dr., Montclair, CA 91763 USA
info@cspopro.com
All information is Copyright © 2005 Csp

www.cspopro.com