


# FS8

MADE IN USA.

## 2-way sound systems

- 100% Factory Quality Control
- 100% Factory Speaker Construction
- 100% Factory Tested
- 5 year Warranty
- Manufactured with Pride in the United States

Fs8 is composed of 8" units. Ultra heavy low frequency, bright mid to high frequency with high sensitivity and large output. It is a fusion of high-end acoustics and professional power. 2-way sound systems, special Flying Version.

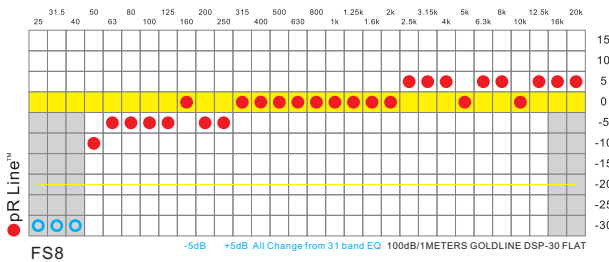

## SPECIFICATIONS:

System Type: 2-way, Full range, bass ported	Drivers: LF (1 x Csp 8LV2i) HF (1 x PZT)
Frequency Range: 60 Hz - 20 kHz (-10 dB) 75 Hz - 20 kHz (+/-3 dB)	Input Connection: One two-terminal barrier strip input connectors
Power Capacity: 300 W Continuous 1200 W Peak	Enclosure Hardware: 3/4" MDF wood, UPWE™ black polyurea finish
Recommended Power Amplifier: PaulAudio 202	Grille: 18 gauge perforated steel, additional powder coated
Sensitivity (1w/1m): 98 dB	Dimensions (H x W x D): 10.875" x 16" x 10.875" 276 mm x 406 mm x 276 mm
Maximum Output: 128 dB	Weight: 28.5 lbs (12.7 kg)
Nominal Impedance: 8 Ohms	Shipping weight: 60.5 lbs (27 kg)/2Pcs
Nominal Dispersion: 45° x 90°	
Crossover: T5rfs8	

## APPLICATIONS:

Clubs, Karaoke Clubs, Health Clubs  
Offices, Classrooms, Meeting Rooms  
A/V Systems  
Houses of Worship  
Sport Facilities  
Distributed Systems

## FEATURES:

Lv2 Technology, Flying version  
High power handling - 300 watts(average) and 1200  
watts(peak) power capacity  
45° x 90° horn designed for even coverage and smooth  
response on and off axis  
1" PZT HF Driver  
The advanced network topology crossover design shapes the  
frequency response to deliver coherent summation in the  
crossover region  
3/4" MDF wood, UPWE™ (Ultrachrome Protecting wood  
enclosures) black polyurea finish  
18 gauge perforated steel, additional powder coated

Csp Professional  
5157 Cliffwood Dr., Montclair, CA 91763 USA  
info@cspopro.com  
All information is Copyright © 2005 Csp

[www.cspopro.com](http://www.cspopro.com)

FS8

Csp