

K6

MADE IN USA.

Multi-way sound systems
<http://cspopro.com/p/k6.asp>

100% Factory Quality Control


100% Factory Speaker Construction

100% Factory Tested

5 year Warranty

Manufactured with Pride in the United States

The K6 loudspeaker yields 90 degrees horizontal coverage at 90 degrees vertical

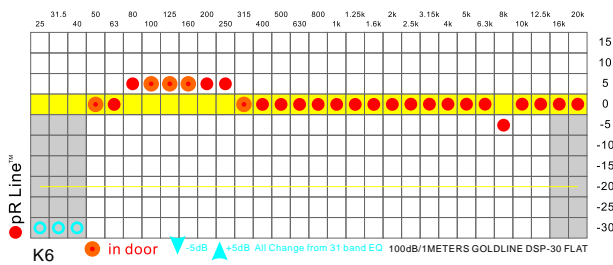

SPECIFICATIONS:

System Type:
Multi-way, Full range, bass ported

Frequency Range:
45 Hz - 20 kHz (-10 dB)
55 Hz - 20 kHz (+/-3 dB)

Power Capacity:
600 W Average
2400 W Peak

Recommended Power Amplifier:
P.PA Series

Sensitivity (1w/1m):
97 dB

Maximum Output:
131 dB

Nominal Impedance:
4 Ohms

Nominal Dispersion:
90° x 90°

Crossover:
T5rK6

Drivers:
LF (2 x Csp 15LV2i)
MID (1 x Csp 8LV2m)
HF (1 x Csp H450)

High Frequency Driver Protection:
SP DDPJ

Input Connection:
Neutrik Speakon in Parallel

Enclosure Hardware:
3/4" MDF wood, UPWEJ
Special black polyurea finish

Grille:
18 gauge perforated steel,
additional powder coated

Dimensions (H x W x D):
25.125" x 17.25" x 16.4375"
638 mm x 438 mm x 417 mm

Weight:
63 lbs (28 kg)

Shipping weight:
66 lbs (29.3 kg)

APPLICATIONS:

Sound Reinforcement
Clubs, Karaoke Clubs, Health Clubs
Offices, Classrooms, Meeting Rooms
A/V Systems
Houses of Worship
Sport Facilities
Distributed Systems

FEATURES:

Damping Speaker Technology
High power handling - 600 watts(average) and 2400 watts(peak) power capacity
90° x 90° horn designed for even coverage and smooth response on and off axis
1" Titanium HF Driver
SP DDPJ Distortion Dynamic Protection
The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region
3/4" MDF wood, UPWEJ Special(Ultrachrome Protecting wood enclosures) black polyurea finish
18 gauge perforated steel, additional powder coated
Manufactured with Pride in the United States

Csp Professional
5157 Cliffwood Dr., Montclair, CA 91763 USA
info@cspopro.com
All information is Copyright © 2005 Csp

www.cspopro.com

K6

Csp