

8" TWO-WAY FULL RANGE BASS-REFLEX LOUDSPEAKER SYSTEM

UNIT SELL POINT (USP):


- 100% Factory Quality Control
- 100% Factory Speaker Construction
- 100% Factory Tested
- Manufactured with Pride in the United States

APPLICATIONS:

- •Karaoke Clubs,
- •Sound Reinforcement Clubs,
- •Health Clubs Offices, Classrooms, Meeting Rooms
- •A/V Systems
- •Houses of Worship
- •Distributed Systems

FEATURES:

- High power handling 225 watts (average) and 900 watts (peak) power capacity
- 90° x 90° horn designed for even coverage and smooth response on and off axis
- 1" Titanium HF Driver with ferrofluid cooled
- SP DDPJ Distortion Dynamic Protection
- The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region
- 3/4" MDF wood, UPWEJ (Ultrachrome Protecting wood enclosures) black polyurea finish
- 18 gauge perforated steel, additional powder coated

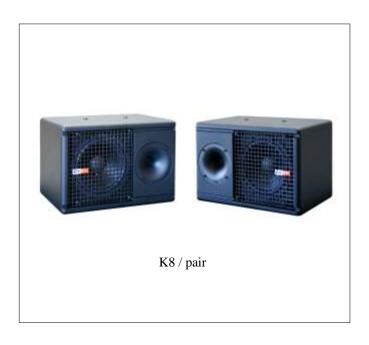

Specifications:

System Type:

2-way, Full range, bass ported

Frequency Range:

40 Hz - 20 kHz (-10 dB)

60 Hz - 20 kHz (+/-3 dB)

Power Capacity:

225 W (RMS)

900 W (Peak)

Recommended Power

Amplifier:

400W - 650W @ 4 Ohms

Sensitivity (1w/1m):

96 dB

Maximum Output:

125.5 dB

Nominal Impedance:

8 Ohms

Nominal Dispersion:

90° x 90°

Crossover Frequency:

2.25 kHz

Drivers:

LF (1 x Csp 8LV2X) HF (1 x Csp H452)

High Frequency Driver Protection:

SP DDPJ

Input Connection:

2 x 1/4" phone jacks in parallel

Enclosure Hardware:

3/4" MDF wood, UPWEJ black polyurea finish

Grille:

18 gauge perforated steel, additional powder coated

Dimensions (H x W x D):

10.875" x 15.875" x 10.875" 276 mm x 403 mm x 276 mm

Weight:


31.5 lbs (14 kg)


Shipping weight:

64 lbs (28.5 kg) (one pair)





8" TWO-WAY FULL RANGE K8 BASS-REFLEX LOUDSPEAKER SYSTEM

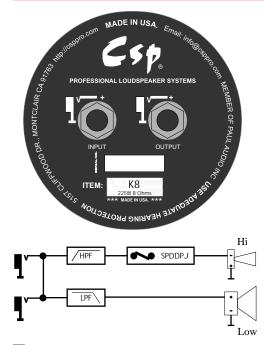


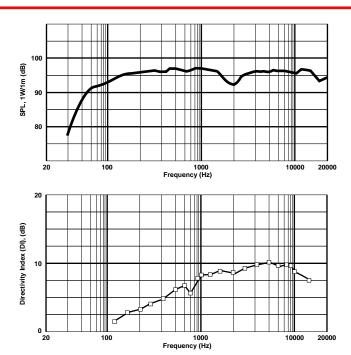

D_{IMENSIONS}



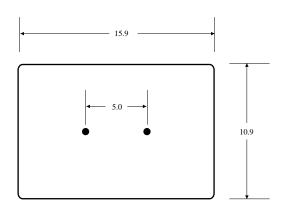



Dimensions in inch