



15" TWO-WAY FULL RANGE BASS-REFLEX LOUDSPEAKER SYSTEM

LA15V3

UNIT SELL POINT (USP):

- 100% Factory Quality Control
- 100% Factory Speaker Construction
- 100% Factory Tested
- Manufactured with Pride in the United States

APPLICATIONS:

- Concerts
- Clubs
- Mobile DJ
- Houses of Worship
- Entertainment

FEATURES:

- LV3 Technology
- Trapezoid Design
- Die-cast aluminum basket
- High sensitivity, low distortion
- SP DDPJ (Speaker Distortion Dynamic Protection)
- UPWEJ (Ultrachrome Protecting wood enclosures) black polyurea finish
- Compression driver with titanium diaphragm
- Manufactured with Pride in the United States
- Neutrik Speakon & Dual 1/4 Phone Jacks in Parallel
- Pole mount socket



LA15V3

SPECIFICATIONS:

System Type:

2-way, Full range, bass ported

Frequency Range:

60 Hz - 20 kHz (-10 dB)

75 Hz - 18 kHz (+/-3 dB)

Power Capacity:

600 W (Continuous)

2400 W (Peak)

Recommended Power

Amplifier:

P.PA2

Sensitivity (1w/1m):

98 dB

Maximum Output:

132 dB

Nominal Impedance:

8 Ohms

Nominal Dispersion:

90° x 90°

Crossover Frequency:

2.0 kHz

Drivers:

LF (1 x Csp 15LV3)

HF (1 x Csp H452)

High Frequency Driver

Protection:

SP DDPJ

Input Connection:

One Neutrik Speakon Dual 1/4" phone jacks in parallel

Enclosure Hardware:

3/4" MDF wood, UPWEJ black polyurea finish

Grille:

18 gauge perforated steel, additional powder coated

Dimensions (H x W x D):

24.875" x 16.875" x 14.125"

632 mm x 428 mm x 358 mm

Weight:

60 lbs (27 kg)

Shipping weight:

63.5 lbs (28 kg)




Csp Professional

5157 Cliffwood Dr., Montclair, CA 91763 Tel: 909 590-5258 Fax: 909 590-1658 <http://www.csppro.com> info@csppro.com




15" TWO-WAY FULL RANGE BASS-REFLEX LOUDSPEAKER SYSTEM

LA15V3

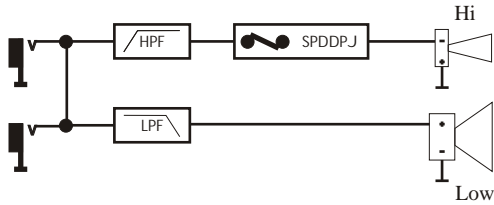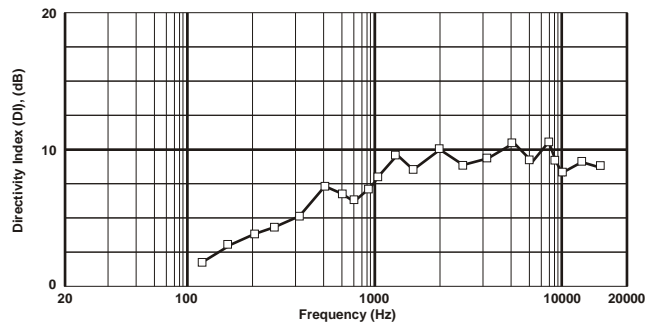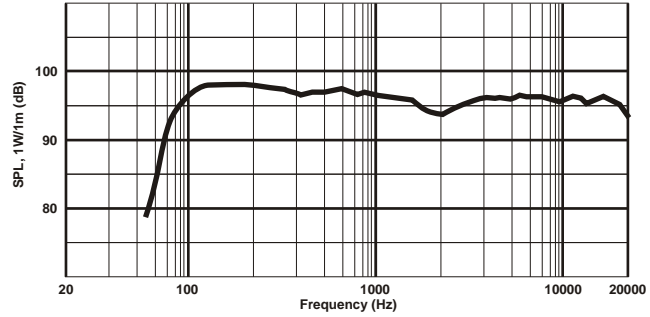

DIMENSIONS

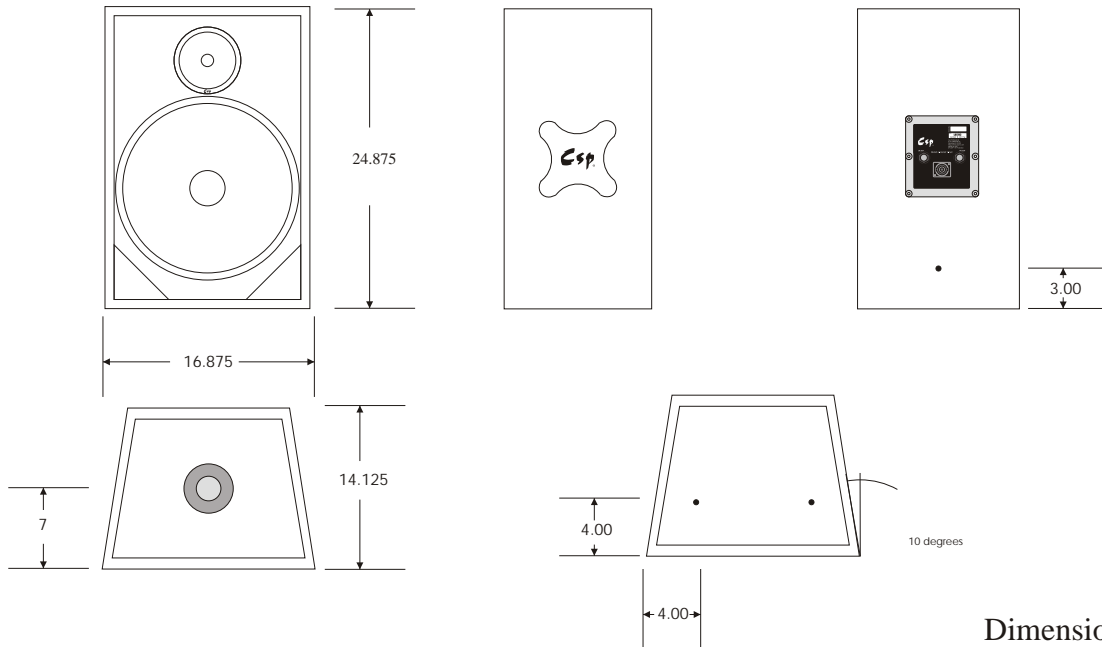

Dimensions in inch

Csp Professional

5157 Cliffwood Dr., Montclair, CA 91763 Tel: 909 590-5258 Fax: 909 590-1658 <http://www.csppro.com> info@csppro.com

© 2004, Csp Professional ★ Part # la15v3 ★ Csp professional member of Paul Audio Inc.