



## Rs40

MADE IN USA.

### 2-way sound systems

If you have a chance to hear the sound of RS series, you will be shocked to hear the fine and smooth rendition of the product!


There are six different RS products. They are RS40, RS41, RS52 and RS43, which have full audio frequency, and RS50 and RS60, which are ultra bass speakers.

Each of this series is of refined design. From the 8" frequency-halving design to the twin 15" ultra bass design, the accuracy of treble and dynamics of bass are among the top in the industry.

The special design of the speaker box helps maximally improve the product's range of application. The suspension device makes the installation more flexible and versatile.

The special UPWE processing of its housing helps extending the range of application of the product series outdoor. Thus, it is a true all-weather product.

Why not let RS40 show you what it's got!?! Yes. What you'll hear is the convulsion generated by a single 8" professional unit! For an audience of 300, you'll only need one pair of RS40.

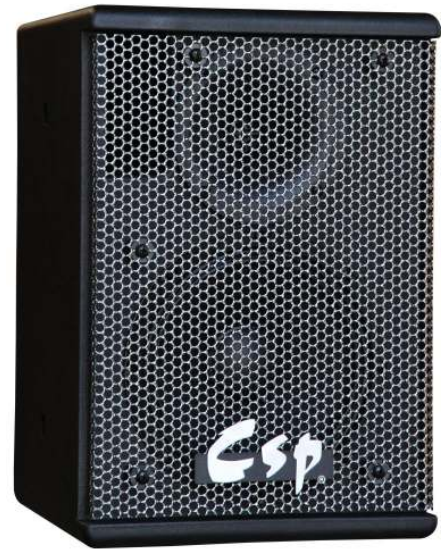

### SPECIFICATIONS:

System Type: 2-way, Full range, bass ported	Drivers: LF (1 x Csp 8LV2) HF (1 x Csp H452)
Frequency Range: 50 Hz - 20 kHz (-10 dB) 100 Hz - 20 kHz (+/-3 dB)	High Frequency Driver Protection: SP DDPJ
Power Capacity: 250 W Continuous 1000 W Peak	Input Connection: One Speakon jacks in parallel
Recommended Power Amplifier: PaulAudio 212	Enclosure Hardware: 3/4" MDF wood, UPWEJ black polyurea finish
Sensitivity (1w/1m): 97 dB	Grille: 18 gauge perforated steel, additional powder coated
Maximum Output: 127 dB	Dimensions (H x W x D): 10.875" x 15.875" x 10.875" 276 mm x 403 mm x 276 mm
Nominal Impedance: 8 Ohms	Weight: 30 lb (13.3 kg)
Nominal Dispersion: 90° x 90°	Shipping weight: 63.5 lb (28 kg) (2 by 1)
Crossover Frequency: 2.5 kHz	

### APPLICATIONS:

Sound Reinforcement  
Clubs, Karaoke Clubs, Health Clubs  
Offices, Classrooms, Meeting Rooms  
A/V Systems  
Houses of Worship  
Sport Facilities  
Distributed Systems

### FEATURES:

Lv2 Technology, Flying version  
High power handling - 250 watts(average) and 1000 watts(peak) power capacity  
90° x 90° horn designed for even coverage and smooth response on and off axis  
1" Titanium HF Driver  
SP DDPJ Distortion Dynamic Protection  
The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region  
3/4" MDF wood, UPWEJ (Ultrachrome Protecting wood enclosures) black polyurea finish  
18 gauge perforated steel, additional powder coated

Csp Professional  
5157 Cliffwood Dr., Montclair, CA 91763 USA  
info@cspopro.com  
All information is Copyright © 2005 Csp