



RS50 15" Direct-Radiating Bass-Reflex Subwoofer

UNIT SELL POINT (USP):

100% Factory Quality Control
100% Factory Speaker Construction
100% Factory Tested
Manufactured with Pride in the
United States

APPLICATIONS:

Sound Reinforcement
Clubs, Karaoke Clubs, Health Clubs
Offices, Classrooms, Meeting Rooms
A/V Systems
Houses of Worship
Sport Facilities
Distributed Systems

FEATURES:

15" woofers
High power handling - 500 watts
(average) and 2000 watts (peak)
power capacity
The advanced network topology
crossover design shapes the
frequency response to deliver
coherent summation in the crossover
region
3/4" MDF wood, UPWEJ (
Ultrachrome Protecting wood
enclosures) black polyurea finish
18 gauge perforated steel, additional
powder coated



SPECIFICATIONS:

System Type:
Direct-Radiating Bass-Reflex
Subwoofer
Frequency Range:
35 Hz - 2000 Hz (-10 dB)
50 Hz - 1800 Hz (+/-3 dB)
Power Capacity:
500 W (RMS)
2000 W (Peak)
**Recommended Power
Amplifier:**
P.PA2
Sensitivity (1w/1m):
97 dB
Maximum Output:
130 dB
Nominal Impedance:
8 Ohms
Recommended Crossover
Frequency:
150 Hz
Drivers:
LF (1 x Csp 15LV3)

Input Connection:

Dual Neutrik Speakon jacks in
parallel

Enclosure Hardware:

3/4" MDF wood, UPWEJ black
polyurea finish

Grille:

18 gauge perforated steel,
additional powder coated

Dimensions (H x W x D):

27" x 18.5" x 20"
680 mm x 470 mm x 500 mm

Weight:



80 lbs (36 kg)

Shipping weight:




85 lbs (38 kg)



RS50 15" Direct-Radiating Bass-Reflex Subwoofer

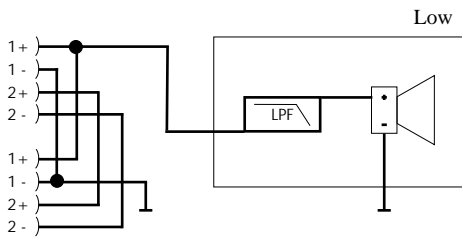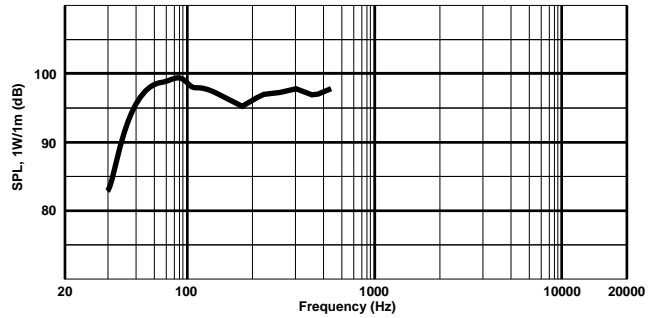

DIMENSIONS

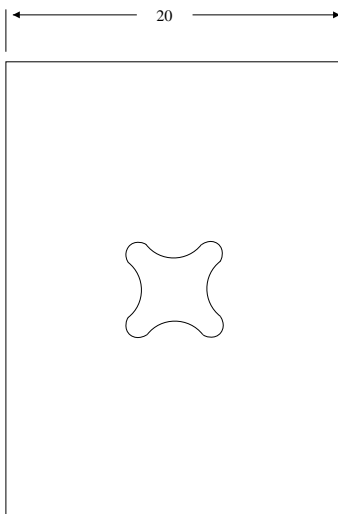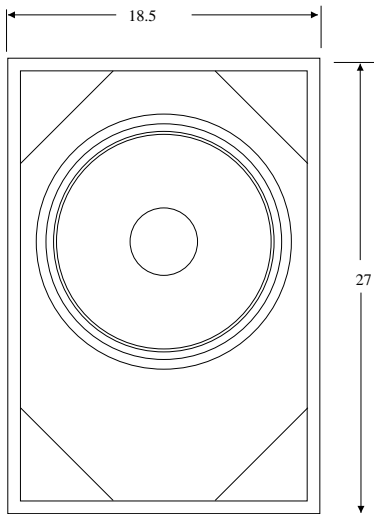

Dimensions in inch

Csp Professional

5157 Cliffwood Dr., Montclair, CA 91763 Tel: 909 590-5258 Fax: 909 590-1658 <http://www.csppro.com> info@csppro.com

© 2004, Csp Professional ★ Part # csprs50★ Csp professional member of Paul Audio Inc.