



RS60 Dual 15" Direct-Radiating Bass-Reflex Subwoofer

UNIT SELL POINT (USP):

- 100% Factory Quality Control
- 100% Factory Speaker Construction
- 100% Factory Tested
- Manufactured with Pride in the United States

APPLICATIONS:

- Sound Reinforcement
- Clubs, Karaoke Clubs, Health Clubs
- Offices, Classrooms, Meeting Rooms
- A/V Systems
- Houses of Worship
- Sport Facilities
- Distributed Systems

FEATURES:

- Dual 15" woofers
- High power handling - 1000 watts (average) and 4000 watts (peak) power capacity
- The advanced network topology crossover design shapes the frequency response to deliver coherent summation in the crossover region
- 3/4" MDF wood, UPWEJ (Ultrachrome Protecting wood enclosures) black polyurea finish
- 18 gauge perforated steel, additional powder coated



SPECIFICATIONS:

System Type:
Direct-Radiating Bass-Reflex Subwoofer

Frequency Range:
35 Hz - 2000 Hz (-10 dB)
50 Hz - 1800 Hz (+/-3 dB)

Power Capacity:
1000 W (RMS)
4000 W (Peak)

Recommended Power Amplifier:
P.PA3

Sensitivity (1w/1m):
101 dB

Maximum Output:
137 dB

Nominal Impedance:
4 Ohms

Recommended Crossover Frequency:
150 Hz

Drivers:
LF (2 x Csp 15LV3)

Input Connection:

Dual Neutrik Speakon jacks in parallel

Enclosure Hardware:

3/4" MDF wood, UPWEJ black polyurea finish

Grille:

18 gauge perforated steel, additional powder coated

Dimensions (H x W x D):

18.375" x 39.875" x 23.625"
460 mm x 1000 mm x 600 mm

Weight:



133 lbs (59 kg)

Shipping weight:


141 lbs (63 kg)



RS60 Dual 15" Direct-Radiating Bass-Reflex Subwoofer

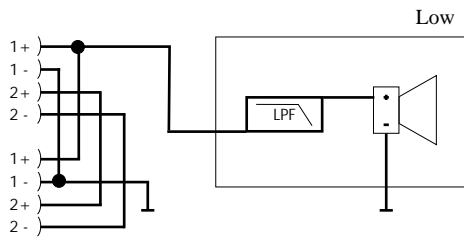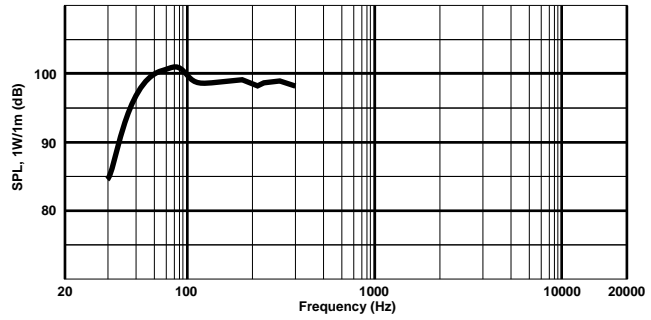

DIMENSIONS

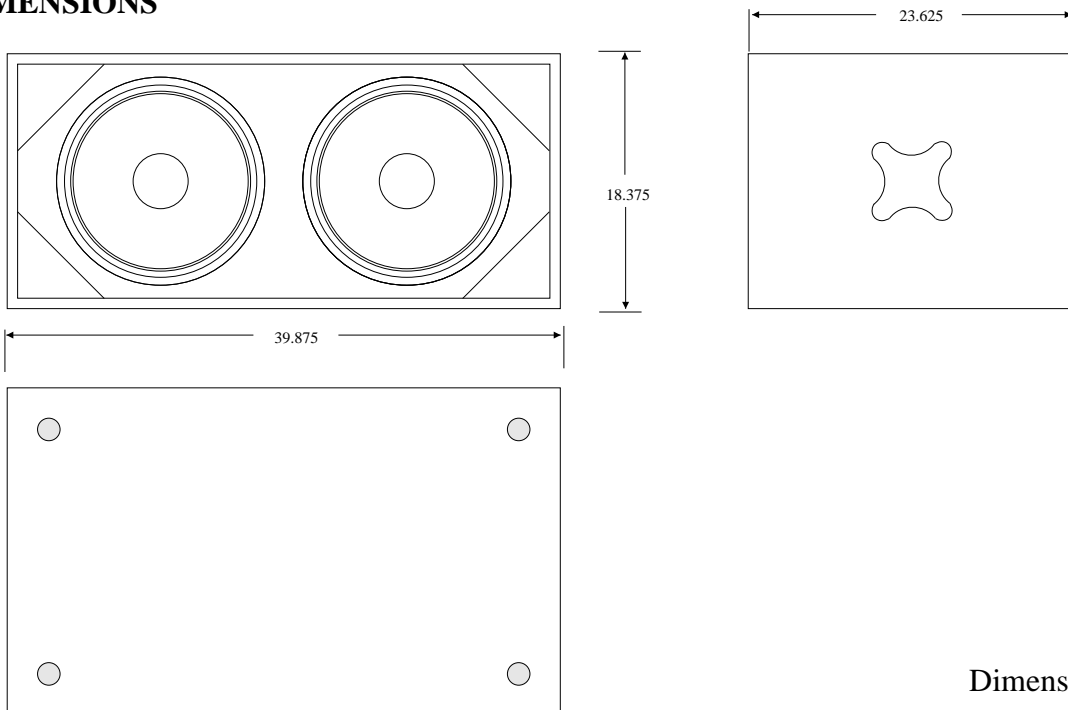

Dimensions in inch

Csp Professional

5157 Cliffwood Dr., Montclair, CA 91763 Tel: 909 590-5258 Fax: 909 590-1658 <http://www.csppro.com> info@csppro.com

© 2005, Csp Professional ★ Part # csprs60★ Csp professional member of Paul Audio Inc.